

NPCAP™-PXC Series

- Super low ESR, impedance and high heat resistance have been obtained by using conductive polymer as electrolyte.
(ESR and rated ripple current values are improved from PXA series.)
- Rated voltage range : 2.5 to 16V_{dc}, Capacitance range : 27 to 470μF
- Case size range : φ5×5.7L to φ8×6.7L
- Suitable for DC-DC converters, voltage regulators and decoupling applications used to computer motherboards etc.
- Pb-free design



◆SPECIFICATIONS


Items	Characteristics	
Category Temperature Range	−55 to +105°C	
Rated Voltage Range	2.5 to 16V _{dc}	
Capacitance Tolerance	±20% (M)	(at 20°C, 120Hz)
Surge Voltage	Rated voltage×1.15V	(at 105°C)
Leakage Current	I=0.2CV (max.) I : Max. leakage current (μA), C : Nominal capacitance (μF), V : Rated voltage (V _{dc})	(at 20°C after 2 minutes)
Dissipation Factor (tanδ)	0.12 max.	(at 20°C, 120Hz)
Low Temperature Characteristics (Max. Impedance Ratio)	Z(−25°C)/Z(+20°C)≤1.15 Z(−55°C)/Z(+20°C)≤1.25	(at 100kHz)
Endurance	The following specifications shall be satisfied when the capacitors are restored to 20°C after the rated voltage is applied for 1000 hours at 105°C.	
	Appearance	No significant damage
	Capacitance change	≤±20% of the initial value
	DF (tanδ)	≤150% of the initial specified value
	ESR	≤150% of the initial specified value
	Leakage current	≤The initial specified value
Bias Humidity	The following specifications shall be satisfied when the capacitors are restored to 20°C after subjecting them to the DC rated voltage at 60°C, 90 to 95% RH for 500 hours.	
	Appearance	No significant damage
	Capacitance change	≤±20% of the initial value
	DF (tanδ)	≤150% of the initial specified value
	ESR	≤150% of the initial specified value
	Leakage current	≤The initial specified value
Surge Voltage	The capacitors shall be subjected to 1000 cycles each consisting of charge with the surge voltage specified at 105°C for 30 seconds through a protective resistor(R=1kΩ) and discharge for 5 minutes 30 seconds.	
	Appearance	No significant damage
	Capacitance change	≤±20% of the initial value
	DF (tanδ)	≤150% of the initial specified value
	ESR	≤150% of the initial specified value
	Leakage current	≤The initial specified value
Failure Rate	1% per 1000 hours maximum (Confidence level 60% at 105°C)	

*Note : If any doubt arises, measure the leakage current after following voltage treatment.

Voltage treatment : DC rated voltage are applied to the capacitors for 120 minutes at 105°C.

◆DIMENSIONS [mm]

- Terminal Code : A

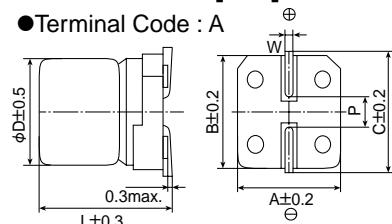


Size code	φD	L	A	B	C	W	P
E60	5	5.7	5.3	5.3	5.9	0.5 to 0.8	1.4
F60	6.3	5.7	6.6	6.6	7.2	0.5 to 0.8	1.9
H70	8	6.7	8.3	8.3	9.0	0.7 to 1.1	3.1

◆MARKING

EX) PXC4VC220M



◆PART NUMBERING SYSTEM

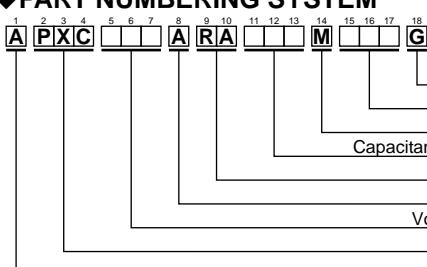

Please refer to "A guide to global code (conductive polymer type)"



NPCAP™-PXC Series

◆STANDARD RATINGS

WV(V _{dc})	Cap(μF)	Size code	ESR(mΩmax/20°C)		Rated ripple current (mA rms/100kHz to 300kHz) -55 to +105°C	Part No.
			100kHz	300kHz(Ref. value)		
2.5	180	E60	30	22	2000	APXC2R5ARA181ME60G
	270	F60	20	18	2700	APXC2R5ARA271MF60G
	470	H70	17	16	3420	APXC2R5ARA471MH70G
4	150	E60	30	22	2000	APXC4R0ARA151ME60G
	220	F60	21	19	2640	APXC4R0ARA221MF60G
	330	H70	18	17	3300	APXC4R0ARA331MH70G
6.3	100	E60	35	26	1780	APXC6R3ARA101ME60G
	180	F60	22	19	2580	APXC6R3ARA181MF60G
	220	H70	18	17	3300	APXC6R3ARA221MH70G
10	56	E60	40	31	1660	APXC100ARA560ME60G
	82	F60	23	21	2400	APXC100ARA820MF60G
	150	H70	20	19	3160	APXC100ARA151MH70G
16	27	E60	45	35	1570	APXC160ARA270ME60G
	39	F60	25	23	2300	APXC160ARA390MF60G
	82	H70	25	23	2830	APXC160ARA820MH70G